


Sundance Spas 680 Prado™

Specifications

<p>Dimensions84" x 76" x 34.5" (213 cm x 193 cm x 87 cm)</p> <p>Seating Capacity.....4-5 Adults</p> <p>Dry Weight.....562 lbs (255 kg)</p> <p>Filled Weight (Spa Volume)4,219 lbs (1,914 kg)</p> <p>Filled Weight (Average Fill).....3,517 lbs (1,596 kg)</p> <p>Water Capacity (Spa Volume)438 US gallons (1,659 Liters)</p> <p>Water Capacity (Average Fill)354 US gallons (1,340 Liters)</p> <p>Electronic ControlsSolid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles</p> <p>Pump 1.....North America (60 Hz): 2-Speed, 2.5 HP brake, 1.5 HP continuous, 48 Frame Export (50 Hz): 2-Speed, 2.0 HP continuous</p> <p>Total Hydrojets:23</p> <p>Seat A Jets:.....3 DXL</p> <p>Seat B Jet:.....6 DXL</p> <p>Seat C Jets:.....4 DX, 2 DVX</p> <p>Seat D Jet:.....4 DVR</p> <p>Foot Well Jets (E):4 DL</p> <p>Air Controls/Massage Selectors: ...4 Air Control; No Massage Selector</p> <p>Filter:50 ft² Filter Cartridge System</p> <p>Water Treatment:.....Factory installed CLEARRAY® Water Purification System</p> <p>Lighting:6 LED bullet lights (4 above water; 2 underwater)</p> <p>Synthetic Cabinet:Available in Coastal, Mahogany, Autumn Walnut</p> <p>Shell Colors:North America: Platinum, Celestite (Gypsum), Sahara, Oyster (Opal), Copper Sand, Monaco, Midnight, Caribbean Surf, Sandstone, Porcelain Export (50 Hz): All North America colors</p> <p>Headrest:.....Three, 1-piece gray</p> <p>Heater:.....North America (60 Hz): High Flow, 1 kW@120 VAC or Convertible to 4 kW@240 VAC; Export (50 Hz): High Flow, 2.7 kW</p> <p>Electrical Requirements:.....North America Convertible Model (60 Hz): 120 VAC@15A with Supplied GFCI Cord or 240 VAC@30A or 40A (Hard Wired Only); Export (50 Hz): 230-240 VAC@20A or 30A or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.</p> <p>Limited Warranty*:.....North America (60 Hz): 5 Years Shell, 2 Years Shell Surface, 2 Years Plumbing Component Leaks, 2 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets, 1 Year Stereo Export (50 Hz): 5 Years Shell, 2 Years Shell Surface, 2 Years Plumbing Component Leaks, 2 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets, 2 Years Stereo</p> <p>Waterfall Feature:None</p> <p>Audio System (Optional):Factory Installed BLUEWAVE® Spa Stereo System (Bluetooth®/Aux compatible only) with four speakers</p>	
--	---

*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Prado

Operation/Seat Depths



- Ⓐ Air control - Activates Seat A Jets (3 DXL) + Footwell Jets (2 DL)
- Ⓑ Air control - Activates Seat B Jets (6 DXL)
- Ⓒ Air Control - Activates Seat C Jets (4 DX, 2 DVX)
- Ⓓ Air Control - Activates Seat D Jets (4 DVR) + Footwell Jets (2 DL)

- Jets Pump 1: Powers All Jets + Waterfall when running

23 Total Jets




Spa Operation Subject To Change Without Notice

SEAT DEPTHS

- A = 25.50" (64.7 cm)**
- B = 27.50" (69.9 cm)**
- C = 27.50" (69.9 cm)**
- D = 27.40" (69.6 cm)**
- E = 30.25" (76.8 cm)**

Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance $\pm 0.5"$ (1.27 cm).

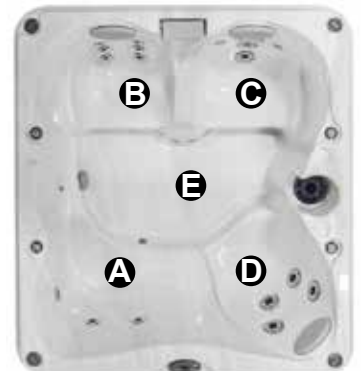


*(See Warranty Document for Specific Details)


Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Prado


Portable Dimensions

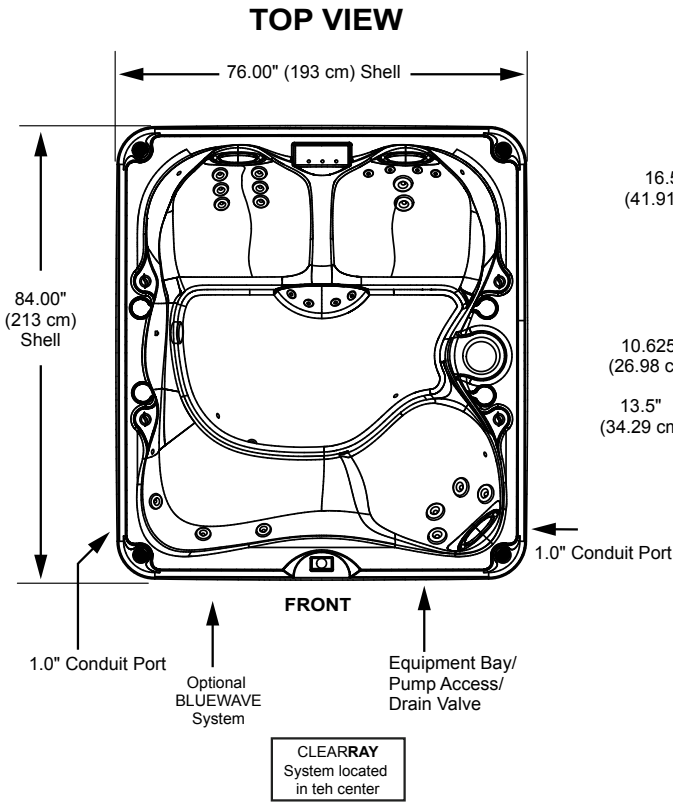


FRONT VIEW
(Front view with stereo option shown)
Tolerance: $\pm 0.5"$ (1.27 cm)

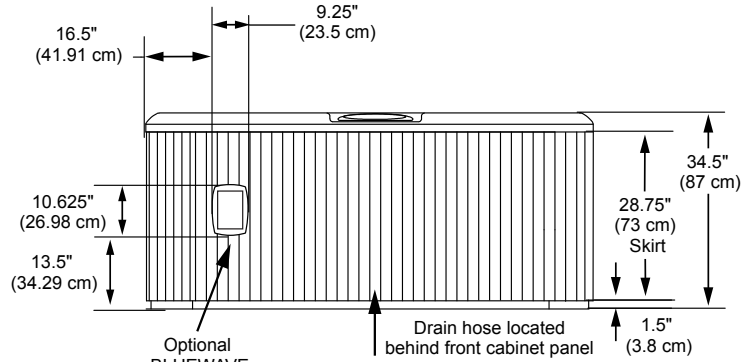

SIDE VIEW
Tolerance: $\pm 0.5"$ (1.27 cm)

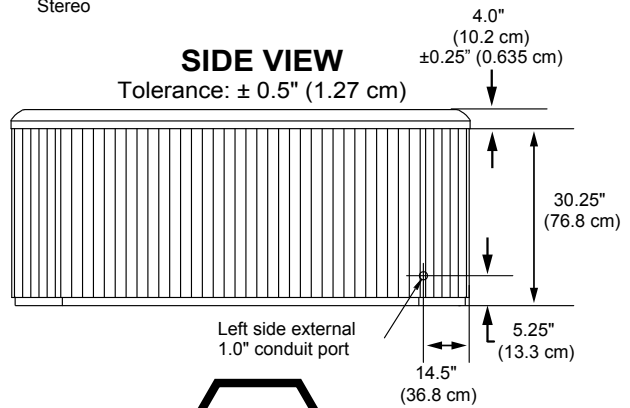

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

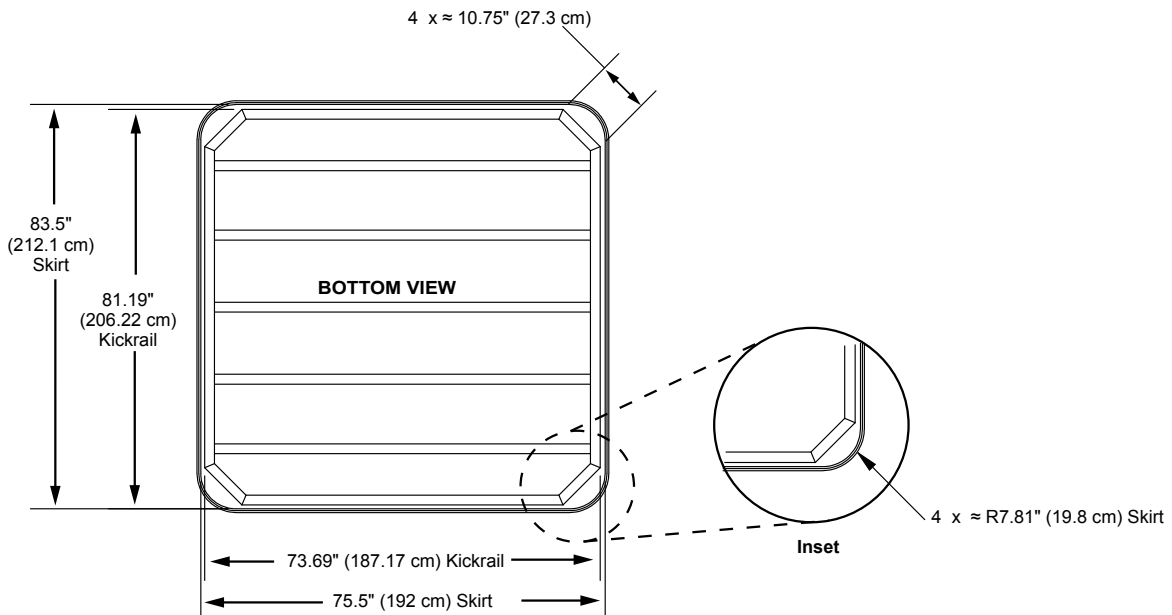

*(See Warranty Document for Specific Details)

Dimensions/Specifications Subject To Change Without Notice

1-fas 230V C-sikring (treg) til alle modeller.
880-modeller kan kobles med 3-fas (400 volt TN-nett - se egne linjer)

Prado				
For å få mest mulig glede av badet anbefaler vi høyeste kurs for optimal drift.				
	Type varmeelement	Alternativ tilkobling	Funksjon	JP1 Jumper Bank
Prado	5,5 kW	32 amp eller 10 + 25 amp	Varmeelement og pumper kan brukes samtidig	Over 7-8
Prado	2,7 kW	20 amp eller 13 + 10 amp	Varmeelement og pumper kan brukes samtidig	Over 7-8
Prado	2,7 kW	16 amp	Varmeelementet slår seg av når pumpene settes på høy hastighet.	Over 1-2 og 7-8